


Falcon Pd is made in HNBR material with cord in Aramid. Suitable for both high speed and high torques. Jens S has profiles 8M and 14M in stock. Requested belt width can be cut from sleeve.

Product Properties


- Temperature range: -30° to 130°C
- Antistatic according to ISO 9563
- Abrasion-resistant fabric layers of high
- Molecular polyethylene / nylon treated
- Very good thermal properties
- Improved HNBR rubber with high hardness
- Encapsulated cord of Aramid



Description		GTR 8M	GTR 14M
Belt widths available	mm	12	20
		21	37
		36	68
		62	90
		62	125
Pitch p	mm	8	14
Belt thickness, h	mm	5,8	9,8
Tooth height, ht	mm	3,2	6,0

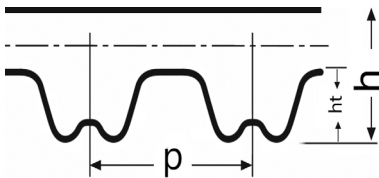

Item no. example:

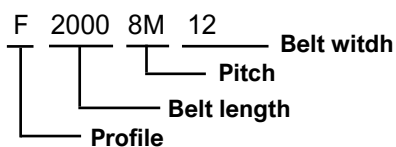

- Material: HNBR
- Cord: Aramid
- Temperature range: -30° to +130°
- Antistatic acc. to ISO 9563

8M		
Pitch length Lp, mm	Number of teeth Z	Sleeve Width
640	80	562 ± 10mm
720	90	562 ± 10mm
800	100	562 ± 10mm
896	112	562 ± 10mm
960	120	562 ± 10mm
1000	125	562 ± 10mm
1040	130	562 ± 10mm
1120	140	562 ± 10mm
1200	150	562 ± 10mm
1224	153	562 ± 10mm
1280	160	562 ± 10mm
1440	180	562 ± 10mm
1600	200	562 ± 10mm
1760	220	562 ± 10mm
1792	224	562 ± 10mm
2000	250	562 ± 10mm
2240	280	562 ± 10mm
2400	300	562 ± 10mm
2520	315	562 ± 10mm
2840	355	350 ± 10mm
3200	400	350 ± 10mm
3600	450	350 ± 10mm
4000	500	350 ± 10mm
4480	560	350 ± 10mm

8M		
Pitch length Lp, mm	Number of teeth Z	Sleeve Width
994	71	562 ± 10mm
1120	80	562 ± 10mm
1190	85	562 ± 10mm
1260	90	562 ± 10mm
1400	100	562 ± 10mm
1568	112	562 ± 10mm
1610	115	562 ± 10mm
1750	125	562 ± 10mm
1890	135	562 ± 10mm
1960	140	562 ± 10mm
2100	150	562 ± 10mm
2240	160	562 ± 10mm
2380	170	562 ± 10mm
2520	180	562 ± 10mm
2660	190	350 ± 10mm
2800	200	350 ± 10mm
3136	224	350 ± 10mm
3304	236	350 ± 10mm
3500	250	350 ± 10mm
3850	275	350 ± 10mm
3920	280	350 ± 10mm
4326	309	350 ± 10mm
4410	315	350 ± 10mm
4956	354	350 ± 10mm
5166	369	300 ± 10mm
6496	464	300 ± 10mm
6636	474	300 ± 10mm