


Wrapped heavy-duty narrow V-belt according to DIN7753. A reinforced polyester cord that provides little maintenance. It is also available on request, in a stronger version with Aramid cord, called Conti-V Power.


Jens S' stocked profiles are SPZ, SPA, SPB and SPC. They are available in length 1200-9500mm.

- Antistatic acc. to ISO 1813
- Material: Chloropene rubber
- Cord: Polyester
- Temperature range: -30°C to +90°C
- Standard: DIN 7753

Profil		SPZ	SPA	SPB	SPC
Inner length	Li (mm)	Li = Lp -38	Li = Lp -46	Li = Lp -60	Li = Lp -84
Outer length	La (mm)	La = Lp +12	La = Lp +17	La = Lp +22	La = Lp +29
Belt height	h (mm)	8	10	13	18
Belt width	b (mm)	9,7	12,7	16,3	22,0
Weight	Kg/m	0,073	0,100	0,178	0,380



Item no. example

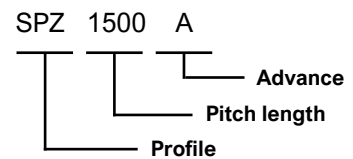

Lp, pitch length. See table on page 9

Conti® V Advance

Conti® V Advance is a narrow designed, high efficient belt. The belt is suitable as a clutch belt and for reverse flexing. Its product properties delivers up to 70 percent higher performance than conventional V-belts, when demands are at their toughest. Thanks to its extended lifetime, the Conti® V Advance ensures long-term cost savings.

Product Properties

- Increased power output as a result of low-stretch polyester cord
- Maintenance-free
- Moderately oil-resistant
- Suitable for tropical climates
- Unaffected by dust
- Temperature resistant from -30°C to +80°C
- Antistatic according to ISO 1813

SPZ	
Item no JENS S.	Pitch length Lp, mm
SPZ1202A	1202
SPZ1212A	1212
SPZ1237A	1237
SPZ1250A	1250
SPZ1262A	1262
SPZ1287A	1287
SPZ1312A	1312
SPZ1320A	1320
SPZ1337A	1337
SPZ1362A	1362
SPZ1387A	1387
SPZ1400A	1400
SPZ1412A	1412
SPZ1437A	1437
SPZ1462A	1462
SPZ1500A	1500
SPZ1512A	1512
SPZ1537A	1537
SPZ1562A	1562
SPZ1587A	1587
SPZ1600A	1600
SPZ1612A	1612
SPZ1637A	1637
SPZ1662A	1662
SPZ1687A	1687
SPZ1700A	1700
SPZ1737A	1737
SPZ1762A	1762
SPZ1787A	1787
SPZ1800A	1800
SPZ1837A	1837
SPZ1862A	1862
SPZ1887A	1887
SPZ1900A	1900
SPZ1937A	1937
SPZ1987A	1987
SPZ2000A	2000
SPZ2037A	2037
SPZ2120A	2120
SPZ2137A	2137
SPZ2187A	2187
SPZ2240A	2240
SPZ2287A	2287
SPZ2360A	2360
SPZ2500A	2500
SPZ2650A	2650
SPZ2800A	2800
SPZ3000A	3000
SPZ3150A	3150
SPZ3350A	3350
SPZ3550A	3550

SPA	
Item no JENS S.	Pitch length Lp, mm
SPA1207A	1207
SPA1232A	1232
SPA1250A	1250
SPA1257A	1257
SPA1272A	1272
SPA1282A	1282
SPA1307A	1307
SPA1320A	1320
SPA1332A	1332
SPA1357A	1357
SPA1382A	1382
SPA1400A	1400
SPA1407A	1407
SPA1432A	1432
SPA1457A	1457
SPA1482A	1482
SPA1500A	1500
SPA1507A	1507
SPA1532A	1532
SPA1557A	1557
SPA1582A	1582
SPA1600A	1600
SPA1607A	1607
SPA1632A	1632
SPA1657A	1657
SPA1682A	1682
SPA1700A	1700
SPA1707A	1707
SPA1732A	1732
SPA1757A	1757
SPA1782A	1782
SPA1800A	1800
SPA1807A	1807
SPA1832A	1832
SPA1857A	1857
SPA1882A	1882
SPA1900A	1900
SPA1907A	1907
SPA1932A	1932
SPA1957A	1957
SPA1982A	1982
SPA2000A	2000
SPA2032A	2032
SPA2057A	2057
SPA2082A	2082
SPA2120A	2120
SPA2132A	2132
SPA2182A	2182
SPA2207A	2207
SPA2232A	2232

Item no JENS S.	Pitch length Lp, mm
SPA2240A	2240
SPA2282A	2282
SPA2300A	2300
SPA2307A	2307
SPA2332A	2332
SPA2360A	2360
SPA2382A	2382
SPA2432A	2432
SPA2482A	2482
SPA2500A	2500
SPA2532A	2532
SPA2582A	2582
SPA2607A	2607
SPA2632A	2632
SPA2650A	2650
SPA2682A	2682
SPA2732A	2732
SPA2782A	2782
SPA2800A	2800
SPA2832A	2832
SPA2847A	2847
SPA2882A	2882
SPA2932A	2932
SPA2982A	2982
SPA3000A	3000
SPA3150A	3150
SPA3182A	3182
SPA3282A	3282
SPA3350A	3350
SPA3382A	3382
SPA3550A	3550
SPA3650A	3650
SPA3750A	3750
SPA3870A	3870
SPA4000A	4000
SPA4250A	4250
SPA4500A	4500

SPB	
Item no JENS S.	Pitch length Lp, mm
SPB1250A	1250
SPB1320A	1320
SPB1400A	1400
SPB1450A	1450
SPB1500A	1500
SPB1550A	1550
SPB1600A	1600

Item no JENS S.	Pitch length Lp, mm
SPB1700A	1700
SPB1800A	1800
SPB1900A	1900
SPB2000A	2000
SPB2020A	2020
SPB2120A	2120
SPB2240A	2240
SPB2280A	2280
SPB2360A	2360
SPB2500A	2500
SPB2650A	2650
SPB2800A	2800
SPB3000A	3000
SPB3070A	3070
SPB3150A	3150
SPB3170A	3170
SPB3250A	3250
SPB3350A	3350
SPB3450A	3450
SPB3550A	3550
SPB3650A	3650
SPB3750A	3750
SPB3800A	3800
SPB3870A	3870
SPB4000A	4000
SPB4060A	4060
SPB4250A	4250
SPB4310A	4310
SPB4500A	4500
SPB4560A	4560
SPB4620A	4620
SPB4750A	4750
SPB4820A	4820
SPB5000A	5000
SPB5070A	5070
SPB5300A	5300
SPB5380A	5380
SPB5600A	5600
SPB5680A	5680
SPB6000A	6000
SPB6300A	6300
SPB6700A	6700
SPB7100A	7100
SPB7500A	7500
SPB8000A	8000

SPC	
Item no JENS S.	Pitch length Lp, mm
SPC2000A	2000
SPC2120A	2120
SPC2240A	2240
SPC2360A	2360
SPC2500A	2500
SPC2650A	2650
SPC2800A	2800
SPC3000A	3000
SPC3150A	3150
SPC3350A	3350
SPC3550A	3550
SPC3750A	3750
SPC4000A	4000
SPC4250A	4250
SPC4500A	4500
SPC4750A	4750
SPC5000A	5000
SPC5300A	5300
SPC5600A	5600
SPC6000A	6000
SPC6300A	6300
SPC6700A	6700
SPC7100A	7100
SPC7500A	7500
SPC8000A	8000
SPC8500A	8500
SPC9000A	9000
SPC9500A	9500